



REYA POWER

ACCESSORIES



HAT
DESIGN WORKS™
HUMAN ACTIVE TECHNOLOGY

SMART. BEAUTIFUL. POWERFUL.

Meet Reya – our new power family. Reya’s design-forward architecture with soft, curved lines offers a full spectrum of mountable power options for your workstation. Whatever your power needs, big or small, Reya provides power conveniently at your fingertips.



REYA 140W SURFACE POWER MODULE

Finishes

- White
WH
- Black
BK

Features


1 USB-A charger port
3 USB-C charger ports
Can charge laptop up to 140 Watts
(requires 5A-Rated USB-C cable, included)
Conforms and tested to UL 962A, UL 1310
Top down mount:
Desk edge: 0.4" - 1.7"

Dimensions

Product: 5.5" x 4.7" x 2.4"
Power supply: 6.3" x 2.7" x 1.4"
Cord length:
Input: 4' (cable to power supply)
Output: 4' (cable from power supply)

Specifications

Input: 100-240V, ~50/60Hz, 2.5A Max.
Output: PD3.1 up to 140W



Item	USB-C1	USB-C2	USB-C3	USB-A
Single Port	140W	45W	45W	18W
Dual Port	100W	30W		
	100W		30W	
	100W			18W
		45W	45W	
		45W		18W
Triple Port			15W	
	100W	20W	20W	
	100W	20W		18W
	100W		15W	
		45W	15W	
Quadruple Port	100W	20W	10W	

Part Numbers

PWRG-ACCC-TD-B-_-_-



REYA 140W CHARGING CAP FOR E5

Finishes

- White
WH
- Silver
SI
- Black
BK

Features


1 USB-A charger port
3 USB-C charger ports
Can charge laptop up to 140 Watts
(requires 5A-Rated USB-C cable, included)
Conforms and tested to UL 962A, UL 1310
In-mount for E5 monitor arm

Dimensions

Product: 6.7" x 3.7" x 2.1"
Power supply: 6.3" x 2.7" x 1.4"
Cord length:
Input: 4' (cable to power supply)
Output: 4' (cable from power supply)

Specifications

Input: 100-240V, ~50/60Hz, 2.5A Max.
Output: PD3.1 up to 140W



Item	USB-C1	USB-C2	USB-C3	USB-A
Single Port	140W	45W	45W	18W
Dual Port	100W	30W		
	100W		30W	
	100W			18W
		45W	45W	
		45W		18W
Triple Port			15W	
	100W	20W	20W	
	100W	20W		18W
	100W		15W	
		45W	15W	
Quadruple Port	100W	20W	10W	

Part Numbers

PWR-ACCC-IM-B-_-_-



HAT
DESIGN WORKS™
HUMAN ACTIVE TECHNOLOGY

800 524 2744 hatdw.com



LOW PROFILE USB HUB

Finishes

- White
WH
- Black
BK

Features


1 USB-A charger port
1 USB-C charger port
Can charge laptop up to 65 Watts (requires 5A-Rated USB-C cable)
Mount: Desk edge/surface mount, under mount, edge mount (desk edge/surface mount: 0.5" – 1.75")

Dimensions

Product: 2.4" x 2.2" x 1.2"
Cord Length, PWR-AC: 5'
Cord Length, PWR-AC-PS: 39" AC Adapter Cable, 71" Power Cable

Specifications

Input: DC, 65W max from HAT Base Control Box
Output: PD3.0 up to 65W



Item	USB-C	USB-A
Single Port	65W	10W
Dual Port	45W	10W

Part Numbers

PWR-AC-__ USB Hub, Requires HAT Base
PWR-AC-PS-__ USB Hub, Includes AC Adapter



STANDARD OR WIRELESS
SURFACE POWER MODULE

Finishes

- White
WH
- Black
BK

Features


2 power receptacles
1 USB-A charger port
2 USB-C charger ports
Can charge laptop up to 65 Watts (requires 5A-Rated USB-C cable)
Conforms and tested to UL 962A and UL 1310 standards
Tamper-resistant (TR) AC outlets
Integrated circuit breaker
Top down mount:
Desk edge: 0.4" – 1.7"

Dimensions

Product: 7.1" x 3.3" x 2.3"
Cord Length: 6'

Specifications

Input: 125VAC, 60Hz, 15A max
Output:
AC Outlets (2): 120VAC, 60HZ, 15A max
Wireless Charging: 5W, 7.5W, 10W, 15W (auto detection)
Output, USB: PD3.0 up to 65W

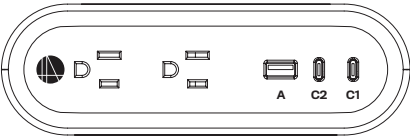

Item	USB-C1	USB-C2	USB-A
Single Port	65W	20W	18W
	45W	20W	
Dual Port	45W		18W
		15W	
Triple Port	45W	15W	

Part Numbers

PWRG-ACC-TD-__ Standard Surface Power Module
PWR-ACC-WRLS-__ Wireless Surface Power Module

Accessory

PWR-UM-CK Under Mount Kit
(Compatible with Standard Surface Power Module only)



POWER STRIP W/HARDWIRED STANDARD SURFACE POWER MODULE

Finishes

- White
WH
- Black
BK

Features

Power Strip: 6 power receptacles
Power Module: 2 power receptacles
1 USB-A charger port
2 USB-C charger ports
Can charge laptop up to 65 Watts
(requires 5A-Rated USB-C cable)

Conforms and tested to
UL 962A, UL 1310, and UL 498 standards

Tamper-resistant (TR) AC outlets

Integrated circuit breaker

Top down mount:
Desk edge: 0.4" – 1.7"

Dimensions


Surface Unit: 7.1" x 3.5" x 4.7"

Power Strip: 14.6" x 2.4" x 1.5"

Cord Length:
Input: 9'
Between Units: 3'

Specifications

Input: 125VAC, 60Hz, 15A max
Output, Power Strip:
AC Outlets (6): 120VAC, 60HZ, 12A max
Output, Surface Mounted Power Module:
AC Outlets (2): 120VAC, 60HZ, 15A max
Output, USB: PD3.0 up to 65W

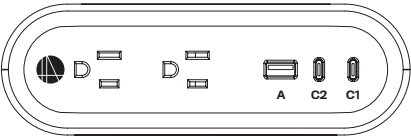

Item	USB-C1	USB-C2	USB-A
Single Port	65W	20W	18W
	45W	20W	
Dual Port	45W		18W
			15W
Triple Port	45W		15W

Part Numbers

PWRG-ACC-TD-STRP-__ Power Strip w/Standard Module



POWER STRIP W/HARDWIRED WIRELESS SURFACE POWER MODULE

Finishes

- White
WH
- Black
BK

Features

Power Strip: 6 power receptacles
Power Module: 2 power receptacles
1 USB-A charger port
2 USB-C charger ports
Can charge laptop up to 65 Watts
(requires 5A-Rated USB-C cable)

Conforms and tested to
UL 962A, UL 1310, and UL 498 standards

Tamper-resistant (TR) AC outlets

Integrated circuit breaker

Dimensions


Surface Unit: 7.1" x 3.1" x 3.4"

Power Strip: 14.6" x 2.4" x 1.5"

Cord Length:
Input: 9'
Between Units: 3'

Specifications

Input: 125VAC, 60Hz, 15A max
Output, Power Strip:
AC Outlets (6): 120VAC, 60HZ, 12A max
Output, Surface Mounted Power Module:
AC Outlets (2): 120VAC, 60HZ, 15A max
Output, USB: PD3.0 up to 65W

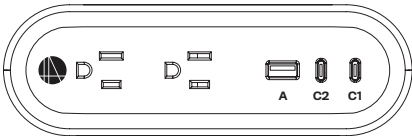

Item	USB-C1	USB-C2	USB-A
Single Port	65W	20W	18W
	45W	20W	
Dual Port	45W		18W
			15W
Triple Port	45W		15W


Part Numbers

PWR-ACC-WRLS-STRP-__ Power Strip w/Wireless Module



POWER STRIP

Finishes



Features

6 power receptacles
Conforms and tested to
UL 962A and UL 498 standards
Tamper-resistant (TR) AC outlets
Integrated circuit breaker

Specifications

Input: 125VAC, 60Hz, 15A max
Output:
AC Outlets (6): 120VAC, 60HZ, 15A max

Dimensions


Product: 14.6" x 2.4" x 1.5"
Cord Length: 9'

Part Numbers


PWR-STRP-__ Power Strip




PWRG-ACCC-TD-B

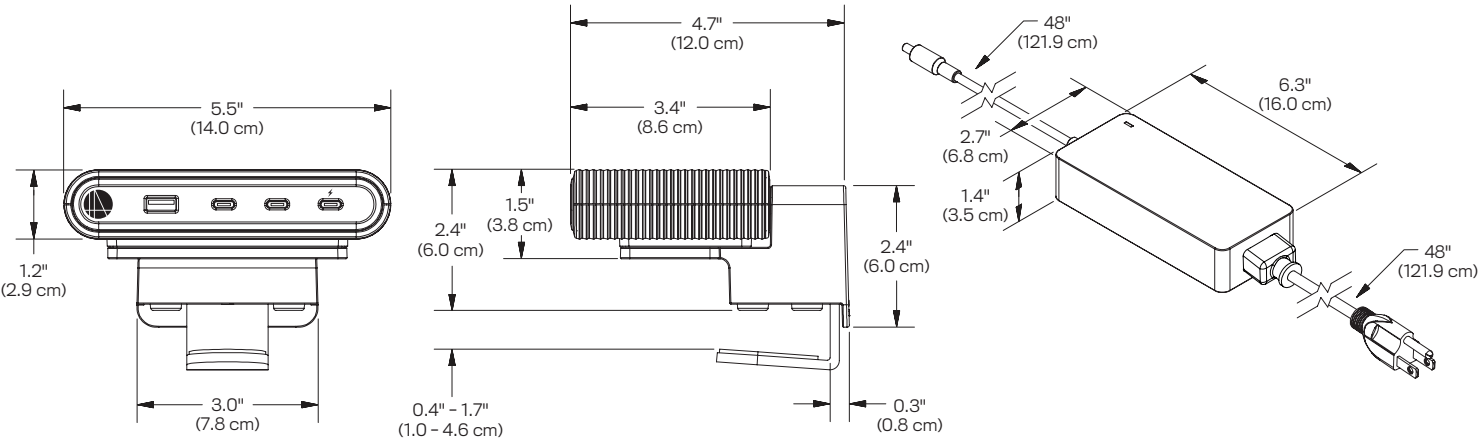


PWRG-ACCC-IM-B

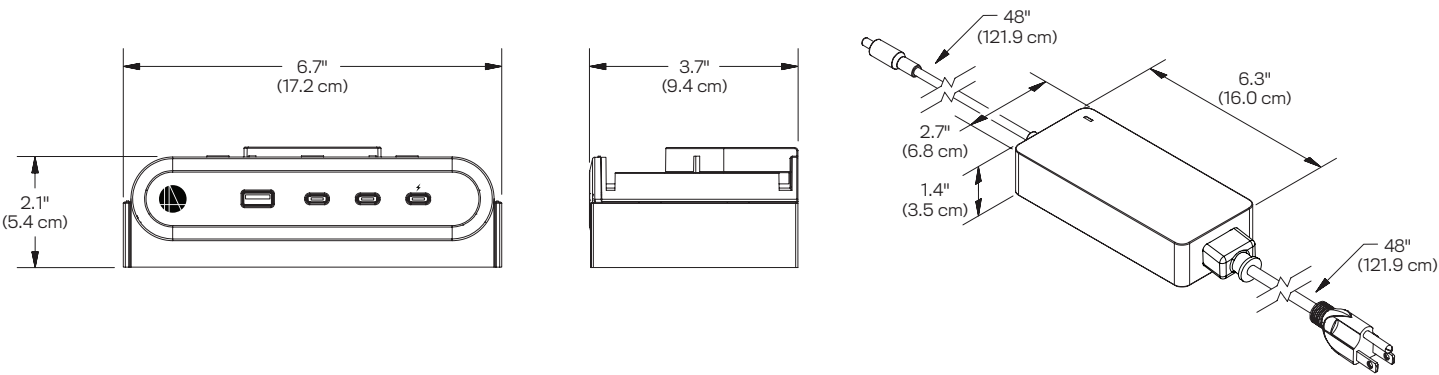


PWR-AC

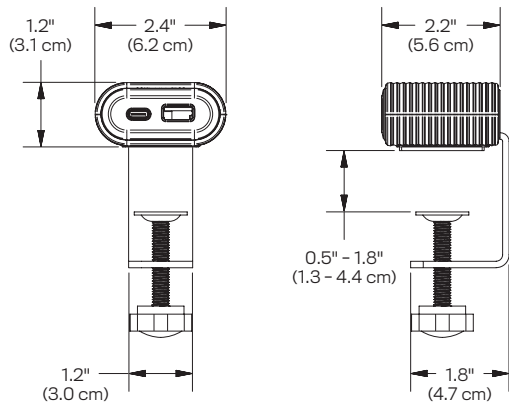


PWR-ACC | PWR-ACC-WRLS

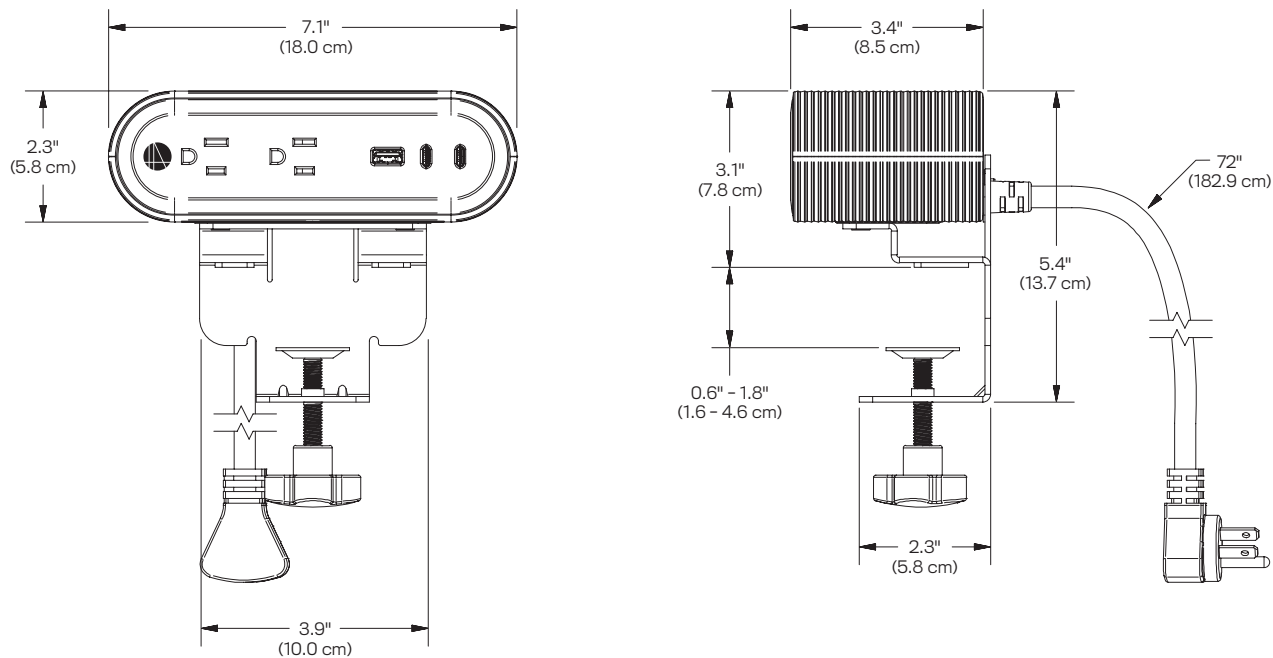


PWR-ACC-WRLS-STRP

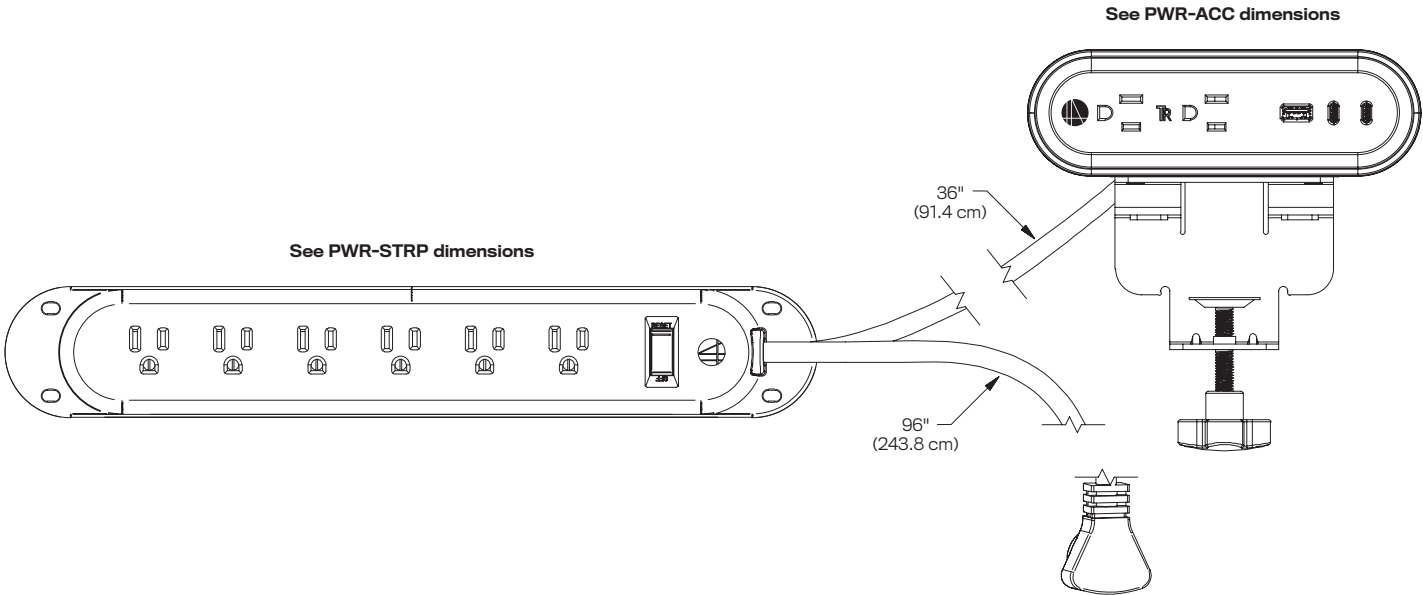

PWRG-ACC-TD | PWRG-ACCW-TD

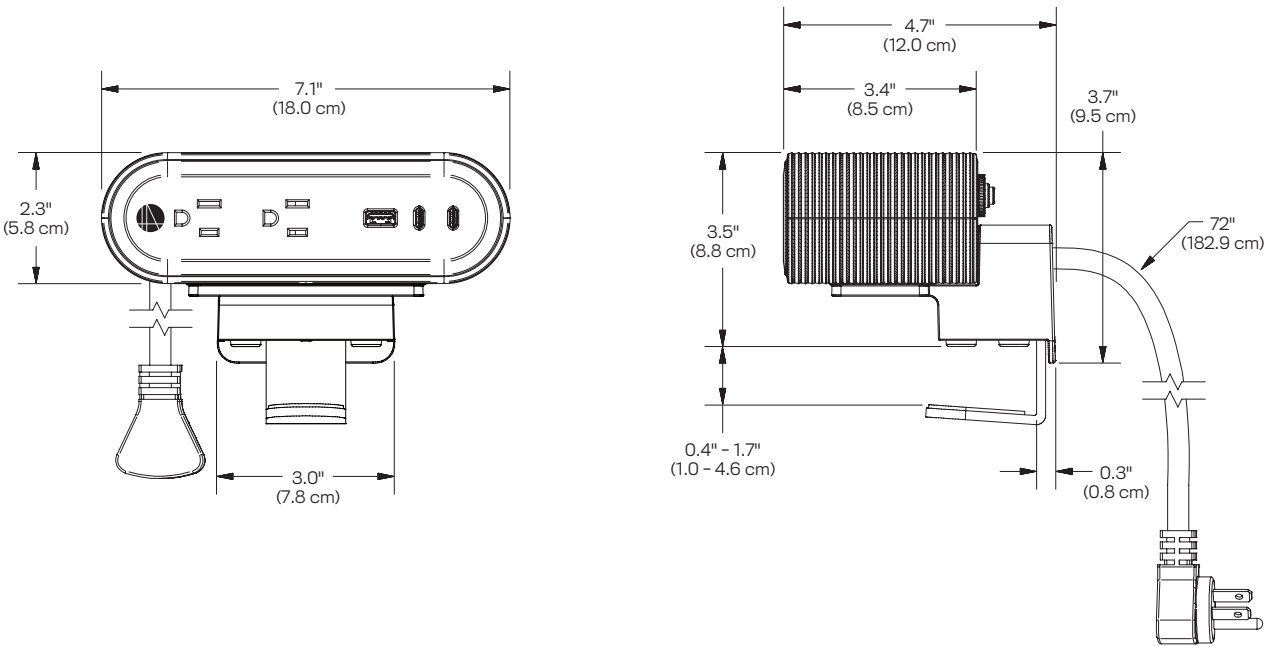

PWRG-ACC-TD-STRP

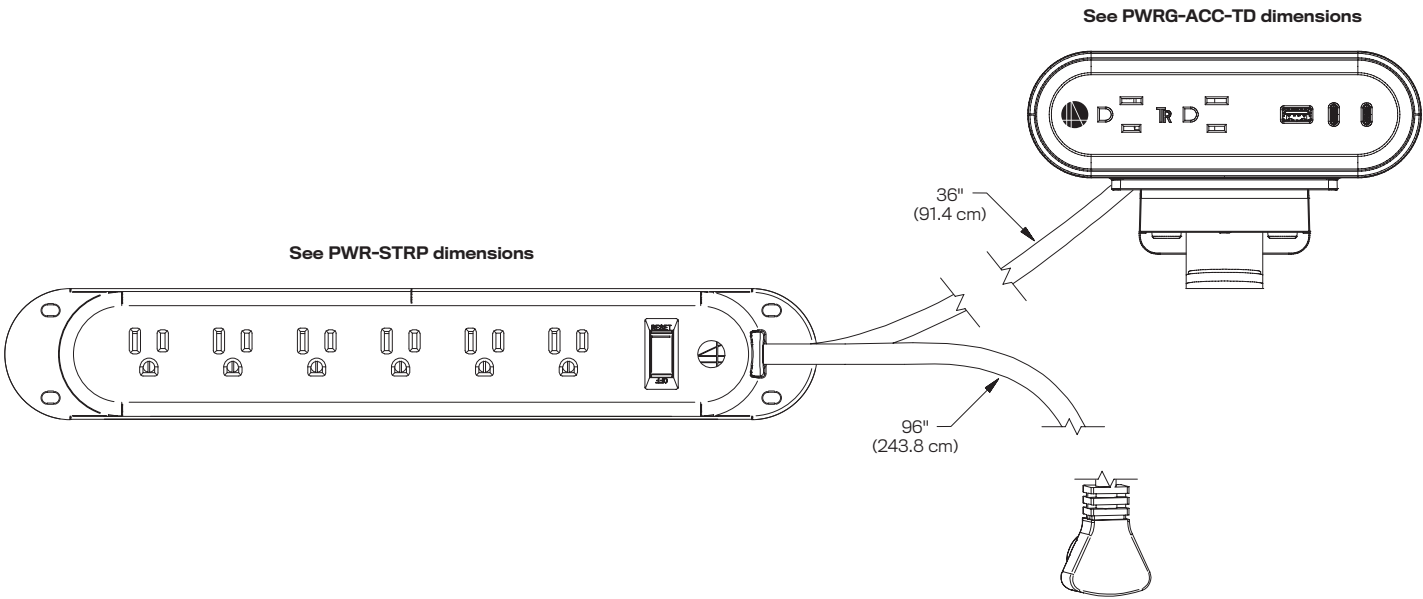

PWR-STRP

